


AIS / AIS-W

Veterinary scales

For weighing live animals
and parcels

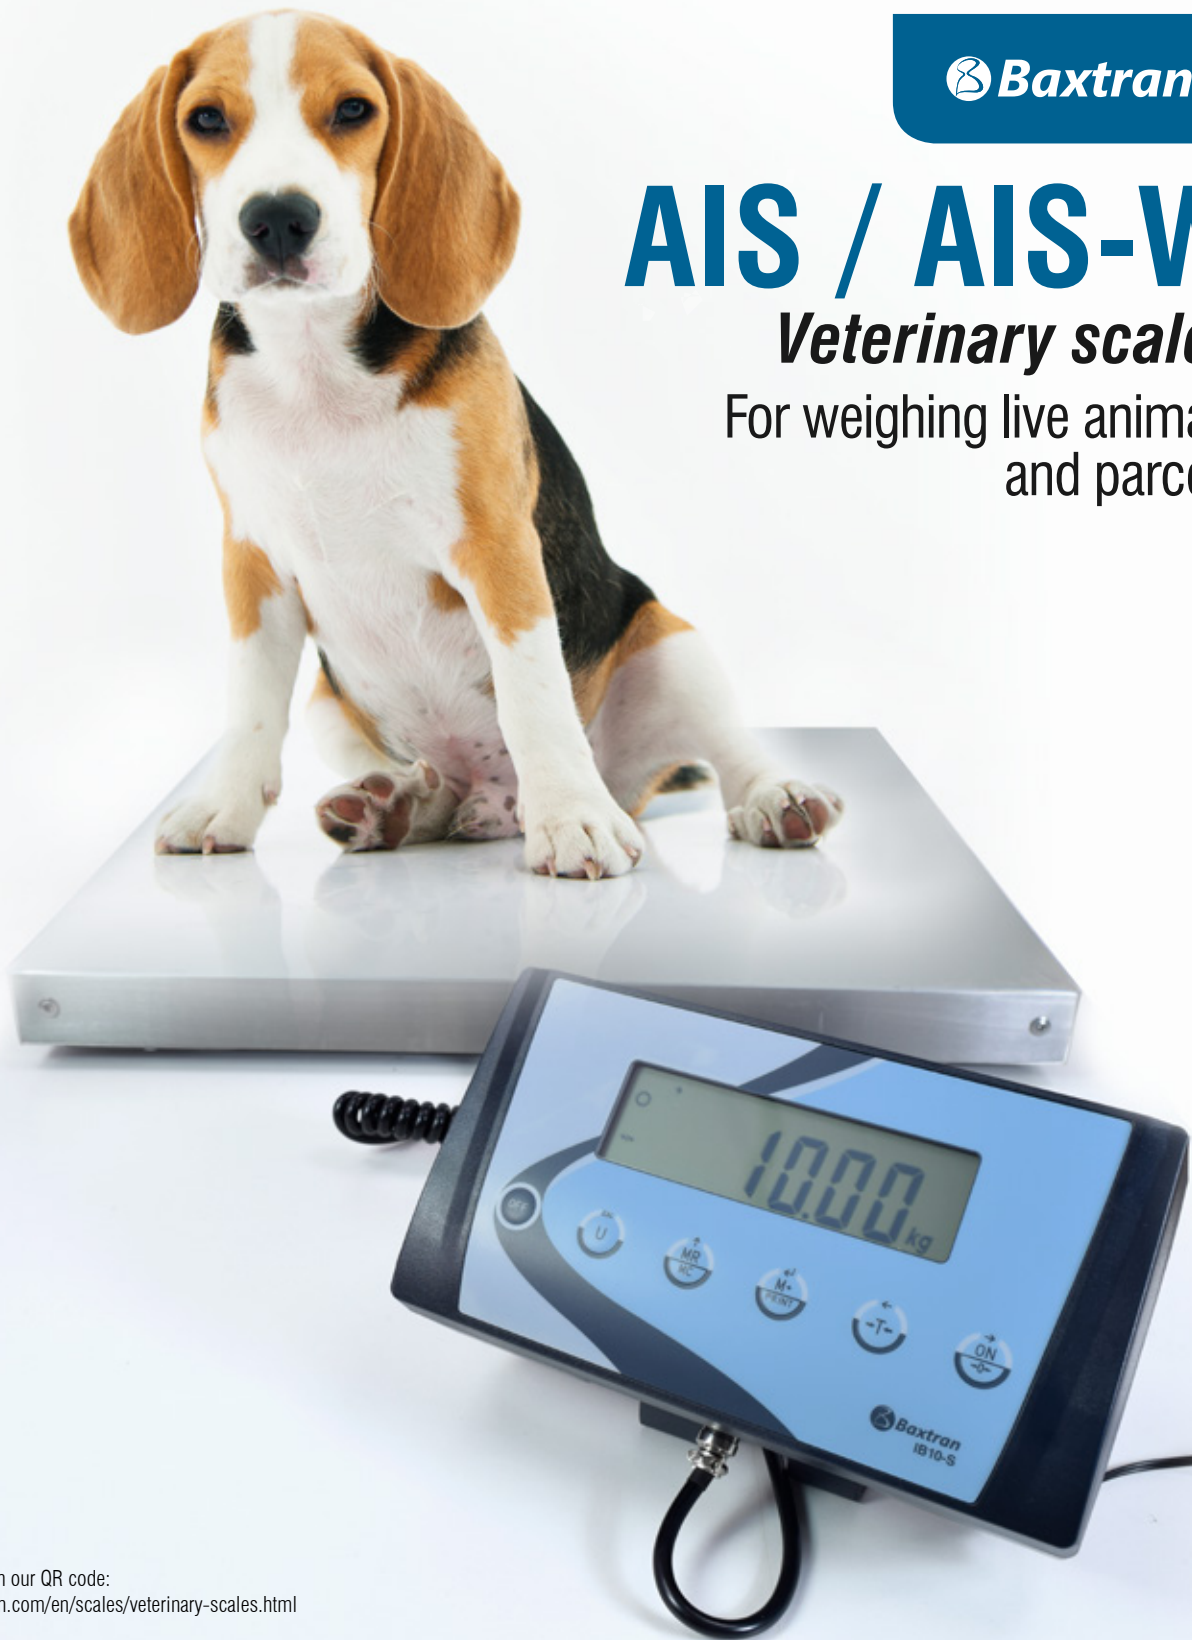

More information in our QR code:
<https://www.baxtran.com/en/scales/veterinary-scales.html>



Flexo cable to distribute even distanced weighing elements



Platform indicator and power supply connection. Wall or overground support



LCD indicator in ABS with 100h internal battery duration without interruption

Veterinary scale



MOVE



CHECK



PCS



RS232



RS232



BAT INT



AC/DC



IP54



NO VERIF

FEATURES:

- Small 4 load cells platform with indicator
- Ideal for weighing live animals and parcels.
- Aluminium load cells.
- Varnished steel structure
- Stainless steel pan.
- AIS-W version with wheels and handle for improved movement.
- Adjustable feet in height (depending on version).
- ABS indicator, model IB10-S.
- IP54 protection.
- Waterproof keyboard with 5 function keys and ON/OFF keys.
- Backlight LCD display with six 25 mm height digits.
- Backlight of the display with 3 types: automatic, activated and deactivated.
- ABS support for column.
- Operating temperature range: -10°C +40°C.
- Power supply with adaptor AC/DC 240Vac 50Hz.
- Rechargeable internal battery 6V/1.3Ah.
- 100 hours approx. battery life with backlighting on.
- 150 hours approx. battery life without backlighting.
- Programmable gravity.
- Units: g/kg/lb
- RS232 output (PC and print formats).
- Unique range, multi-range or multi-interval.
- Auto switch off (programmable: from 1 to 99 minutes).

FUNCTIONS:

- Accumulation
- Totalization
- Piece counting
- Zero
- Hold 4 modes: deactivate, filter for animals, peak value, stable weight and stable weight with auto cancel in zero.
- Control of weight and pieces (limits function) with visual signal and alarm.
- Tare
- Checkweigher

AIS Version (305 x 315 mm)



With non-slip rubbers on the base, ideal for desktop use




With rounded corners

AIS Version (from 550 x 550)





With adjustable feet in height, ideal for on ground use

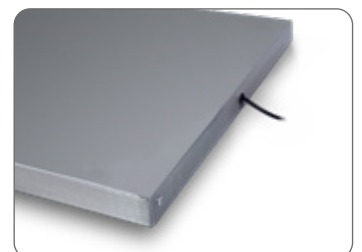

With right angle corners

Dimensions (mm)	a	b	c	Weight
305x315	305	315	60	4
550x550	550	550	45	15
950x500	950	500	45	19




AIS-W Version



Stainless steel handle allows for proper transport



Polyethylene wheels, facilitating transport on the ground

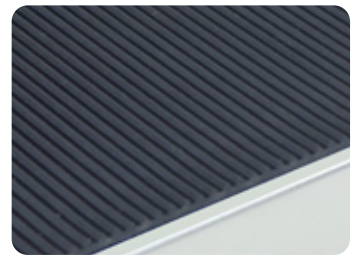

Non-slip rubber base (only in platforms of 950 x 500 mm)

AIS / AIS-W SCALES

#Code	Model	Capacity (kg)	Readout (g)	Pan dimensions (mm)	Packing dimensions (mm)	Packing weight (kg)
261339	AIS	15	5	305x315	370x365x145	5
261340	AIS	35	10	305x315	370x365x145	5
261341	AIS	60	20	305x315	370x365x145	5
261342	AIS	150	50	305x315	370x365x145	5
261343	AIS	300	100	305x315	370x365x145	5
261344	AIS	60	20	550x550	570x640x100	15
261345	AIS	150	50	550x550	570x640x100	15
261346	AIS	300	100	550x550	570x640x100	15
261347	AIS	150	50	950x500	1040x540x100	20
261348	AIS	300	100	950x500	1040x540x100	20
261349	AIS-W	150	50	950x500	1040x540x100	20
261350	AIS-W	300	100	950x500	1040x540x100	20



AIS / AIS-W

Veterinary scales

For weighing live animals and parcels



More information in our QR code:
<https://www.baxtran.com/en/scales/veterinary-scales.html>

