

## Precision scale

Precision scale class II




### FEATURES:

- Backlight LCD display.
- 6 digits of 15 mm.
- External calibration.
- Stainless steel pan.
- 7 keys.
- Capacities from 150 g up to 6000 g.
- Resolution from 0,001 up to 0,1 g according to the capacities.
- ABS housing.
- Protection air panels for scales of 150, 300 and 600 g.
- Four adjustable feet in height.
- Bubble level.
- RS232, PC format and printer.
- Operating temperature range: 0°C +40°C.
- Power supply: 9Vdc, AC/DC adaptor.
- 48 hours long life internal battery.
- It can be used in legal metrology.

### FUNCTIONS:

- Accumulation
- Piece counting
- Percentage weight
- Gross/Net

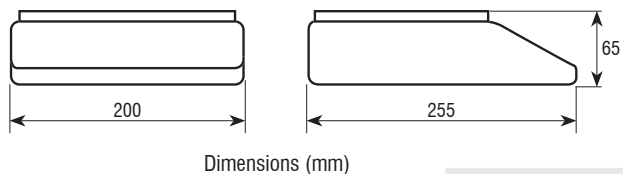

Code #	Capacity (g)	Readout (g)	Readout CE-M (g)	Verification scale (e)	Pan dimensions (mm)	Packing dimensions (mm)	Packing weight (kg)	Certifications	
								ENAC	Code #
260103	150	0,001	-	-	Ø80	240x260x340	2,9	-	-
260105	300	0,005	-	-	Ø120	240x260x340	2,9	900039	-
260109	600	0,01	-	-	Ø120	240x260x340	2,9	900039	-
260101	1500	0,01	-	-	Ø120	240x260x340	2,9	900039	-
260100	1500	0,02	-	-	140x150	240x260x340	2,9	900039	-
260106	3000	0,05	-	-	140x150	240x260x340	2,9	900039	-
260110	6000	0,1	-	-	140x150	240x260x340	2,9	900001	-
260108 <b>M</b>	300	-	0,005	0,05	Ø120	240x260x340	2,9	900039	-
260112 <b>M</b>	600	-	0,01	0,1	Ø120	240x260x340	2,9	900039	-
260107 <b>M</b>	3000	-	0,05	0,5	140x150	240x260x340	2,9	900039	-
260111 <b>M</b>	6000	-	0,1	1	140x150	240x260x340	2,9	900001	-
260104 <b>M</b>	150	-	0,002	0,02	Ø80	240x260x340	2,9	900039	-
260102 <b>M</b>	1500	-	0,02	0,2	Ø120	240x260x340	2,9	900039	-

\*The price for the reference with the icon green M includes the verifications